

721-003-12

ADDENDUM NO. 3

The Architect/ Engineer issues this addendum, applicable to the above named project, to all known Contractors before receipt of proposal.

This addendum includes Item Number 3-1 thru 3-10. This addendum item shall be fully incorporated into the Bidding/Contract Documents and have the same force and effect as though originally included.

The Bidder shall acknowledge receipt of this Addendum No. 3 on the Bid Proposal Form in the place provided.

GENERAL

Item 3-1: All interior steel shall be ground smooth to NOMMA1 quality.

LANDSCAPE

Drawings

Item 3-2: Sheet L3.02 Schedule

Change all Curb Inlets to Type A-2 per L.S.P.101.

ARCHITECTURAL

Specifications

Item 3-3: Section 04 43 13 – Adhered-Stone Masonry Veneer

- a) Refer to Paragraph 2.3, Granite stone tile attachment system by Stone Truss Systems, Thin Stone TS100 Granite Tile System. Contact: Francis Cox, Phone: 212-838-7667. Or equivalent.
- b) India Black Pearl available through Midwest Tile and Granite, Lincoln, NE.
- c) Refer to Paragraph 2.8 Masonry Cleaners, Add product Prosoco, SureKlean Limestone Restorer. Apply to all existing exterior limestone to remain.

Drawings

Item 3-4: Sheet A0.02 – Demolition First Floor

Temporary 4'-0" secured and protected pathway to the vault shall route from the single outswing exterior door immediate to the south of the lobby entrance doors the point of access shall remain intact for the Owner's use. Pathway shall be walls and overhead protected constructed of ½" plywood on 2x4 wood stud framing.

721-003-12

Item 3-5: Sheet A1.01 – Basement Floor Plan

- a) Stair S2: Add aluminum handrail to the east, west and south walls of stairwell. Handrail shall be CR Laurence HRH15SA 1-1/2" diameter. Rails shall comply with all ADA Guidelines.
- b) Stair S3: Add aluminum handrail to the east and west walls of stairwell. Handrail shall be CR Laurence HRH15SA 1-1/2" diameter. Rails shall comply with all ADA Guidelines.

Item 3-6: Sheet A2.01 – Exterior Elevations

All exterior existing limestone to remain shall be treated with Limestone Restorer.

Item 3-7: Sheet A2.02 – Signage Wall Alternate

Clarification: Teller Window and installation is by Owner.

Item 3-8: Sheet A8.04 – Section Details

Refer to Supplemental Drawing SDA-001 for revisions to Detail 9.

MECHANICAL

Specification

Item 3-9: Section 23 09 01 – Hydronic Control Valves

Reference Paragraph 2.2.C.3: Add Delta P Valve by Flow Control Industries and Ultra Setter by Bell and Gossett as approved equal hydronic control valves.

Drawings


Item 3-10: Sheet M7.01 Mechanical Schedules

Reference Heat Pump Schedule: Change "or Equivalent" to "or Approved Equivalent". Approved Equivalent heat pump manufacturers are Florida Heat Pump, Climate Master, Water Furnace and Carrier. Change model number of 6 ton HP-1 from TT-064 to TT-072 with same capacities and electrical characteristics as HP-10.


Attachments:

Supplemental Drawings: SDA-001

END OF ADDENDUM NO. 3

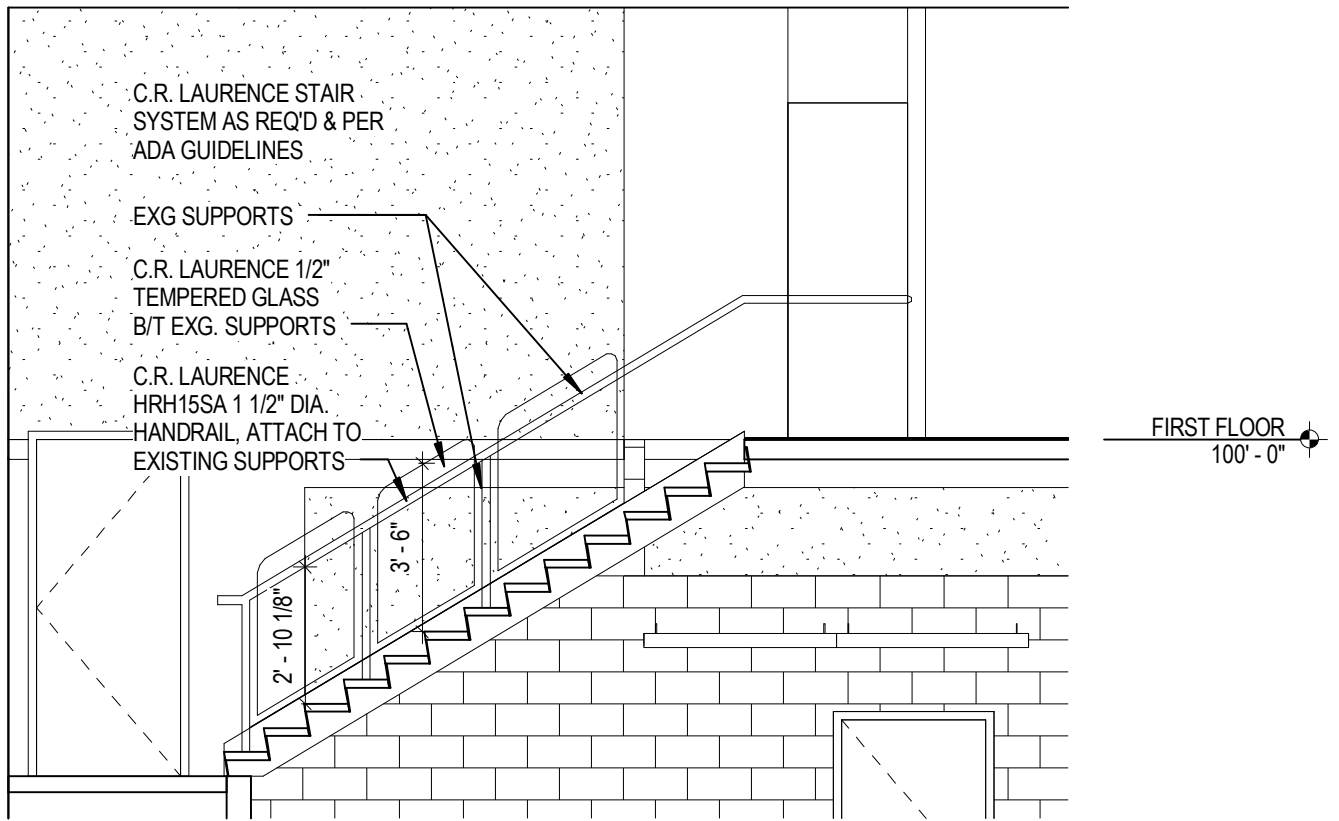

9 SECTION - South Stair
 SCALE: 1/4" = 1'-0"

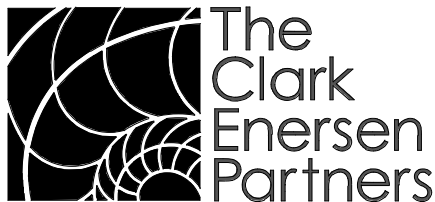

The Clark Enersen Partners
 Architecture + Landscape Architecture + Engineering + Interiors
 1010 Lincoln Mall, Suite 200 Lincoln, NE 68508-2883
 402 477.9291 Fax 402 477.6542
 Kansas City, MO Fairway, KS www.clarkenersen.com

Jones National Bank Remodel and Addition
 Seward, NE
 TCEP No.: 721-003-12

Addendum 003
 Supplemental Drawing: SDA 001
 Revision of Sheet: A8.04
 Date: 03/15/13