



ADDENDUM NO. 2
COUNCIL BLUFFS ROOFS
HAIL DAMAGE REPAIRS
Council Bluffs, Iowa

HGM PROJECT #151212

DATE OF ISSUE: May 24, 2013

DATE OF BID OPENING:

May 29, 2013 until 10:00 a.m. regarding Proposal A and until 2:00 p.m. regarding Proposal B and

May 30, 2013 until 10:00 a.m. regarding Proposal C and until 2:00 p.m. regarding Proposal D

NOTE TO PLANHOLDERS: Please insert this addendum into your copy of the Project Contract Documents. The following additions or changes to the Contract Documents for the above named project are issued by the Architect and have the same force and effect as though part of the original issued.

CHANGES TO PROJECT MANUAL

SECTION 07 41 13 METAL ROOF, WALL & SOFFIT PANELS

Refer to 07 41 13-7, lines 11-15; Delete in entirety and add the following:

As a minimum, unless noted otherwise on drawings, snow guards are to be provided in the style and quantity where snow guards exist in construction areas as indicated on drawings and photographs.

SECTION 07 53 23 EPDM ROOFING

Refer to 07 53 23-5, line 19; Delete in entirety

CHANGES TO DRAWINGS

SHEET A1.101

Refer to Demolition Notes, note 2; Delete in entirety and add the following:

2. Remove TPO roofing system and polyiso insulation to decking, approximately 6" thick.

Refer to Construction Notes, note 3; Delete in entirety and add the following:

3. Provide fully adhered TPO over 1 layer ½" HD polyiso fully adhered to 1 layer 3" polyiso and 1 layer 2 ½" polyiso mechanically fastened to structure. Provide tapered insulation & crickets where indicated – See attached drawing.

If a substitute material, product or manufacturer has been requested to be allowed, it will appear in an addendum only if approved. If not in the addenda, the alternate method, product or manufacturer is not approved.

All other stipulations and requirements of the plans and specifications remain in effect. This addendum shall be attached to and made part of the Contract Documents and shall be acknowledged with the

1 bidders proposal.

2

3 Respectfully Submitted:

4 HGM ASSOCIATES INC.

5



6

7

8 Dean Fajen, P.E., A.I.A.



9 Project Manager

10

11 Attachment: AD2-A1-101-05242013

AD2 - A1-101-05242013

*This drawing can be used as a submittal drawing for your PIN on Firestone warranted projects.

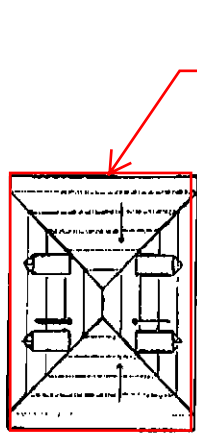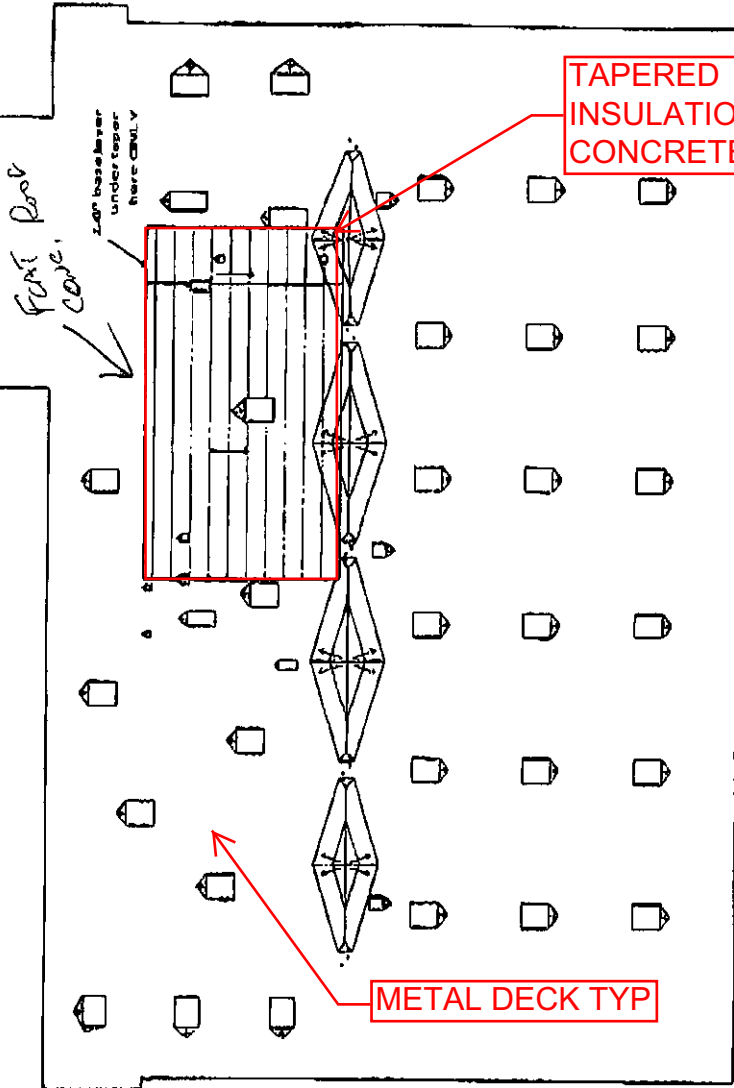

TAPERED INSULATION ON CONCRETE DECK

METAL DECK TYP

TAPERED INSULATION ON CONCRETE DECK

Ver 3 - Base Bid

NOTE:
1/4" /ft Taper, 1/2" /ft Crickets, No flat, .5" taper min start,
1" base layer under taper where indicated.

Project: CB Public Works Operation

Ver 1: Base Bid, Ver 2: All

Location: Council Bluffs, IA

Quote / Version: 10-IA-5021 ver 1 & 2

Firestone
BUILDING PRODUCTS

NOBODY COVERS YOU BETTER.®

Date: 2010/04/09 08:31.22

Estimator: Cindy L. McCarter

Scale: Not to Scale