



29 JULY 2014

MILITARY DEPARTMENT
STATE of NEBRASKA
LINCOLN, NEBRASKA

NEBRASKA ARMY NATIONAL GUARD JFHQ A/V INFRASTRUCTURE PROJECT

at the

Joint Force Headquarters Building
2433 NW 24th Street
Lincoln, Nebraska 68524-1801

for the

MILITARY DEPARTMENT
STATE of NEBRASKA
Lincoln, Nebraska

A D D E N D U M N O . 1

The original specifications and drawings on the STATE OF NEBRASKA REQUEST for PROPOSAL FORM for the project noted above are amended as noted in this Addendum No. 1.

Receipt of this Addendum shall be acknowledged by inserting its number and date in the space provided on the Bid Form.

ADDENDUM NO. 1

NOTE TO ALL PLANHOLDERS: Please insert this Addendum into your copy of the Contract Documents for the above named project.

The following changes to the Contract Documents are issued by the CFMO-CMB and shall have the same force and affect as though a part of the original issue.

THE RECIEPT DATE, TIME and LOCATION of the BID PROPOSAL submission HAS NOT CHANGED.

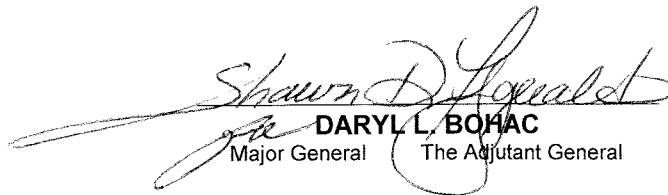
ITEM NO.:

1. Cable:
 - a. All cables must be run in 3/4" conduit.
 - b. All cables are to be installed inside walls. Surface mounted conduit is not permitted.
 - c. The Contractor is to utilize existing cable runs for new data jack locations where available.
 - d. There is a data closet for each floor located on the west side of the building, west of the latrines.
 - e. Cable does not need to be sleeved or fire stopped.
 - f. All existing conduit used in the conference rooms 2112, 3110, 4203 should be 3/4".
 - g. The east walls in 2112, 3110, 4203 were insulated with 2" of sprayed insulation along exterior side of wall.
 - h. The conduit in the floor does not run straight to the wall in the conference rooms 2112, 3110, 4203.



2. Ceiling Tiles & Paint:
 - a. The Nebraska Military Department will provide ceiling tiles.
 - b. The Nebraska Military Department will provide paint type and color code.
 - c. The Contractor shall provide paint.
3. Speakers:
 - a. Two new speakers shall be installed each of the following rooms: 3001 & 3002. The new speakers shall be separate from the existing speakers. The existing speakers are for sound if all the partitions are opened up. The new speakers will only serve each room when partitions are closed.
 - b. The speakers to be installed in 3001 & 3002 shall be have a plenum rated amplifier, installed above ceiling and connected to the ceiling receptacle provided for the overhead projector for electricity.
 - c. The Nebraska Military Department shall provide new speakers to be installed in 3001 & 3002.
4. HDMI Extenders, HDMI Cable, HDMI Matrix Switches/Splitters:
 - a. HDMI extenders are permitted only if necessary for reliable signal.
 - b. HDMI extenders must allow for HDCP pass-through.
 - c. HDMI cable is to run locally from input to output locations.
 - d. If space is a concern running through existing conduit, micro HDMI cable is permitted. Contractor can run mini HDMI to HDMI cable (type A-C) with an adapter (female C to male A).
 - e. The Nebraska Military Department shall provide HDMI matrix switches/splitters.
 - f. Cat 5e/Cat 6 cables used with signal converters are not permitted for use.
5. Flip Top and Floor Boxes:
 - a. The Contractor shall provide flip top boxes.
 - b. The Contractor shall floor boxes.
 - c. In conference rooms where a flip top box is to be installed, the Contractor shall provide and install a short whip from floor box that will terminate in the flip top box.
 - d. In Conference Room 2112 there are two floor boxes under the table, the Contractor is to use the one closest to the center of the table.
 - e. Flip top boxes manufacturer and model is specified in the plans,
 - f. The floor box to be installed in room 2201 has no specific requirements other than it must be sized and configured to fit all the jacks & receptacles that are required.
6. Televisions/Monitors
 - a. The TV to be mounted in the break room will be able to accept coax cable and television signals directly.
 - b. All of the existing TV's have an HDMI port.

THIS ADDENDUM SHALL BE ATTACHED TO AND MADE A PART OF THE DRAWINGS AND SPECIFICATIONS AND SHALL BE ACKNOWLEDGED WITH THE BIDDER'S PROPOSAL.


DARRYL L. BOHAC
Major General The Adjutant General

End of Addendum No. 1

