



06 January 2015

MILITARY DEPARTMENT
STATE of NEBRASKA
LINCOLN, NEBRASKA

NEBRASKA ARMY NATIONAL GUARD 1776 RC DATA CABLING PROJECT

at the

**1776 Readiness Center
1776 North 10th Street
Lincoln, Nebraska 68508**

for the

MILITARY DEPARTMENT
STATE of NEBRASKA
Lincoln, Nebraska

PROJECT NO. 31030134

ADDENDUM NO. 1

The original specifications and drawings on the STATE OF NEBRASKA REQUEST for PROPOSAL FORM for the project noted above are amended as noted in this Addendum No. 1.

Receipt of this Addendum shall be acknowledged by inserting its number and date in the space provided on the Bid Form.

ADDENDUM NO. 1

NOTE TO ALL PLANHOLDERS: Please insert this Addendum into your copy of the Contract Documents for the above named project.

The following changes to the Contract Documents are issued by the CFMO-CMB and shall have the same force and affect as though a part of the original issue.

THE RECIEPT DATE, TIME and LOCATION of the BID PROPOSAL submission HAS NOT CHANGED.

ITEM NO.:

ADD 1-1: Pre-Bid Meeting Sign-In Sheet

A. Refer to the sign-in sheet, attached at the end of this addendum.

ADD 1-2: General Items

A. Contractor must be on site to receive and accept their own deliveries. The Owner will not accept deliveries on behalf of the Contractor.

PROJECT MANUAL

ADD 1-3: Enclosure 1 to the Supplementary Conditions of the Contract for Construction

A. Delete Primary Contractor and Subcontractor Employees 155th Security Forces Squadron (SFS) memorandum, in its entirety.



ADD 1-4: Section 27 1005, Structured Cabling for Voice and Data

- A. Paragraph 2.04.A.5.a. – In addition to the specified green cable jacket color, provide white as an additional color.

DRAWINGS

ADD 1-5: Sheet E3.0, Enlarged Telecom Plans, Symbols, and Schedules

- A. Detail E5, Enlarged IT Closet 167B Demolition Plan:
 - 1. Remove Bogen paging equipment on west wall in its entirety, including amplifier, eleven (11) PCM zone modules, speaker cables, and associated speakers.
 - 2. Remove six (6) NET350 CCTV encoders/decoders (not shown) from west wall, in their entirety, including coaxial cables (8), tel/data cables (11), and power strip.
- B. Detail E11, Enlarged IT Closet 167B Plan:
 - 1. Relocate sound system floor mounted equipment rack from northwest corner of room, to Janitor 168, as shown on attached drawing E1.
- C. Detail K5, Telecom Riser Diagram:
 - 1. Fiber optic cables (2) to lower level SIPR/NIPR equipment racks and for the equipment in the southeast corner of Collateral Processing 007, shall be replaced with single mode 12-strand fiber (Fiber cables are not currently shown on riser), see Sheet E0.0 for location of SIPR rack, NIPR rack is located in southeast corner of Controlled Area 014.

THIS ADDENDUM SHALL BE ATTACHED TO AND MADE A PART OF THE DRAWINGS AND SPECIFICATIONS AND SHALL BE ACKNOWLEDGED WITH THE BIDDER'S PROPOSAL.

DARYL L. BOHAC

Major General The Adjutant General


End of Addendum No. 1



SHEET NOTES




27. INSTALL 60" HIGH RELOCATED EQUIPMENT RACK BELOW STORAGE SHELVING. EXTEND EXISTING SPEAKER CABLES (7) TO NEW LOCATION, CORE DRILL WALL AND PROVIDE CONDUIT SLEEVE AS REQUIRED FOR CABLES. FIRE SEAL ENDS OF CONDUIT, AFTER INSTALLATION OF CABLES.
28. NEW SOUND SYSTEM DUPLEX OUTLET AND 20A, 120V CIRCUIT TO DESIGNATED PANEL. CONNECT TO SPARE BREAKER.

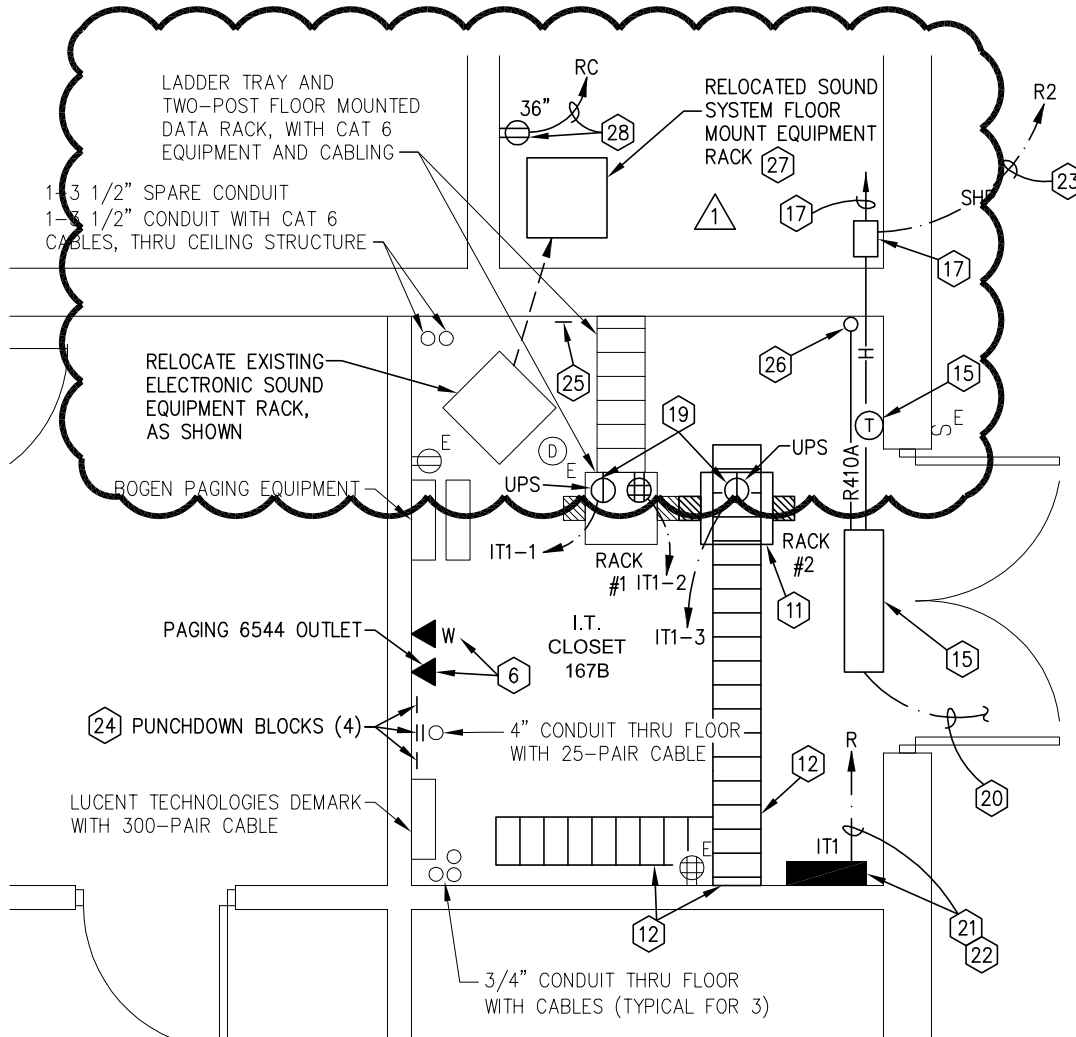

1776 RC DATA CABLING
REPLACEMENT
ENLARGED IT CLOSET 167B

SCALE: 1/4" = 1'-0"

BJH



Engineering Technologies Inc.
Mechanical & Electrical Building Solutions

825 M Street, Suite 200 | Lincoln, NE 68508
P 402.476.1273 | F 402.476.1274
1111 N. 13th Street, Suite 216 | Omaha, NE
68102 | P 402.330.2772 | F 402.330.2630
ETI Project No: (2014-158)

ADD #1

SHEET
E3.0

ATTACHMENT NO.

E1

1/6/2015

